

HIGH PERFORMANCE TECHNOLOGY



C368/C308/C258

Easy connectivity



Connect with mobile devices

Enjoy a flexible mobile work style by using bizhub C368/C308/C258 together with iOS, Android and Windows 10 mobile devices. Users can take advantage of printing and other bizhub features through their favourite industry standard mobile technologies (see below).

Convenient Mobile Touch Area

Pair Android mobile devices^{*1} with bizhub C368/C308/C258 by simply holding them close to the Mobile Touch Area on the multi-touch screen. NFC (Near Field Communication) ensures smooth, quick connections. The Mobile Touch Area can also be used to log in, print files, scan documents and import scanned data.^{*2} iOS devices pair using Bluetooth LE (BLE).^{*3}

^{*1} Android OS 4.4 or higher and Konica Minolta Mobile Print must be installed.

^{*2} Initial setup required for logging in. Wireless LAN environment required for printing and scanning.

^{*3} Optional Device Connection I/F Kit EK-609 is required.

bizhub Remote Access

The bizhub Remote Access app allows operation of bizhub C368/C308/C258 from Android devices and iPhone/iPad/iPod touch. Users can wirelessly operate bizhub hardware and software keys, enter data, import scanned data and send data using the mobile device's address book and more.

Wireless LAN*


Access Point mode and Simple Access Point mode via Wireless LAN allow computers and mobile devices in your office to wirelessly connect with bizhub C368/C308/C258. This creates a fully independent network that supports BYOD (bring your own device) without additional investment. Connection with your company's existing wireless LAN is also supported.

* Optional Upgrade Kit UK-212 or UK-215 is required.

QR code display screen





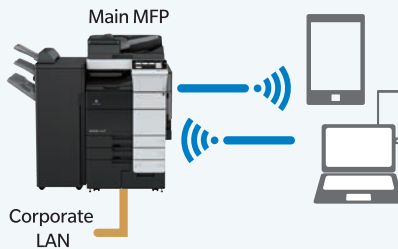


AP mode and Simple AP mode (Wireless LAN)



Up to 5 devices can access bizhub C368/C308/C258 simultaneously in AP mode with UK-212 equipped. Up to 4 devices can access bizhub C368/C308/C258 simultaneously in Simple AP mode with UK-215.

Connect instantly without print drivers to industry standard mobile technologies

Windows 10
Mobile iOS

		Windows 10	Mobile iOS	
	AirPrint Print from any compatible printer on your company's wireless LAN using AirPrint, Apple's standard printing system. It is compatible with iOS 4.2 and Mac OS 10.7 or later.	✓		
	Mopria Print Service This wireless printing technology provides a universal print driver for printing from devices installed with Android 4.4 or later.		✓	
	Google Cloud Print Leading technology connects bizhub C368/C308/C258 with the web so users can print from anywhere outside the office regardless of OS, device or application. <small>Note: Google Cloud Print Setup and Google account registration are required.</small>	✓	✓	
	Konica Minolta Print Service This application enables printing directly from devices running Android 4.4 or later through your company's wireless LAN.		✓	
	Konica Minolta Mobile Print Connect mobile devices with bizhub C368/C308/C258 via Wi-Fi to print documents and images as well as import scanned data.	✓	✓	✓



MFP bizhub C368/C308/C258

MONOCHROME MID-VOLUME MULTIFUNCTION PRINTER

General Specifications

	bizhub C368	bizhub C308	bizhub C258	
Type	Desktop Full Colour Printer / Copier / Scanner			
Colour Support	Full colour			
Copy Resolution	Scan	Main: 600 dpi x Sub: 600 dpi		
	Print	1,800 dpi (equivalent) x 600 dpi		
Gradation	256			
Memory Capacity (Std./Max.)	4 GB			
HDD	250 GB			
Original Type	Sheets, Books, Objects			
Max. Original Size	A3 (11" x 17")			
Output Size	Main unit: SRA3*, A3 to A5, 12-1/4" x 18" (A3 wide (311.1 mm x 457.2 mm)), 11" x 17" to 8-1/2" x 11", 5-1/2" x 8-1/2", 8" x 13", 16K, 8K Bypass Tray: SRA3, A3 to A5, B6*, A6*, 12" x 18" (A3 wide (311.1 mm x 457.2 mm)), 11" x 17" to 5-1/2" x 8-1/2", 8" x 13", 16K, 8K, Postcard (A6 (4" x 6" Card)), Envelope ⁵ , Label sheet, Tab paper, Banner paper (Width: 210 mm to 297 mm (8-1/4" to 11-11/16"), Length: 457 mm to 1,200 mm (18" to 47-1/4")) ⁶			
Image Loss	Max. 4.2mm or less for top edge (5 mm for thin paper), Max. 3.0mm or less for bottom edge, Max. 3.0mm or less for right/left edges *A loss of 4.2 mm each during printing.			
Warm-Up Time ⁷ (23°C, std. voltage)	Colour/B&W: 20 sec. or less			
⁷ * The time required to start printing when both the main power and sub-power switches are turned from OFF to ON.				
⁸ * The time required to start printing when the main power switch is ON and the sub-power switch is turned from OFF to ON.				
	Colour/B&W: 20 sec. or less	Colour/B&W: 18 sec. or less		
First Copy Out	Colour	6.9 sec. or less	7.3 sec. or less	7.5 sec. or less
Time ⁸	B/W	5.3 sec. or less	5.6 sec. or less	6.1 sec. or less
Copy Speed (Colour/B&W, A4)		36 ppm	30 ppm	25 ppm
Copy Magnification	Fixed Same Magnification	1: ±0.5% or less		
	Scaling Up	1: 1.154/1.224/1.414/2.000		
	Scaling Down	1: 0.866/0.816/0.707/0.500		
	Preset	3 types		
	Zoom	25 to 400% (in 0.1% increments)		
	Lengthwise Crosswise Individual Settings	25 to 400% (in 0.1% increments)		
Paper Capacity (80 g/m ²)	Tray 1	500 sheets (up to A3)		
	Tray 2	500 sheets (up to SRA3)		
	Multiple Bypass Tray	150 sheets (up to SRA3)		
Max. Paper Capacity (80 g/m ²) ⁹		6,650 sheets		
Paper Weight	Tray 1 / 2	52 to 256 g/m ²		
	Multiple Bypass Tray	60 to 300 g/m ²		
Multiple Copy		1 to 9,999 sheets		
Auto Duplex	Paper Size	SRA3, A3 to A5, B6*, A6*, 12-1/4" x 18" (A3 wide (311.1 mm x 457.2 mm)), 11" x 17" to 5-1/2" x 8-1/2", 7-1/4" x 10-1/2", 8" x 13", 16K, 8K, Postcard (A6 (4" x 6" Card))		
	Paper Weight	52 to 256 g/m ²		
Power Requirements		AC220 to 240 V 8.0 A (50/60 Hz)		
Max. Power Consumption		1.5 kW or less		
Dimensions [W] x [D] x [H]		615 x 685 x 779 mm (24-3/16" x 27-15/16" x 30-11/16")		
Weight		Approx. 85 kg (187-3/8 lb)		
Space Requirements [W] x [D] ¹⁰		937 x 1,214 mm (36-7/8" x 47-13/16")		

*1 SRA3 paper can be used in Tray2.

*2 There are four types of foolscap: 8-1/2" x 13-1/2", 8-1/2" x 13", 8-1/4" x 13", and 8" x 13".

Any one of these sizes is selectable. For details, contact your service representative.

*3 Short edge feed

*4 There are six types of foolscap: 8-1/2" x 13-1/2", 220 mm x 330 mm³, 8-1/2" x 13", 8-1/4" x 13", 8-1/8" x 13-1/4", and 8" x 13".

Any one of these sizes is selectable. For details, contact your service representative.

*5 Wrinkles or printing errors may occur due to the type, storage or environment that exists when envelope printing is carried out.

*6 Printing on banner paper can only be performed from a PC.

*7 May vary depending on the operating environment and usage.

*8 A4 long edge feed full size/using the first tray/scanning from the original glass surface.

*9 With options installed.

*10 Without options, with paper trays pulled out, and multiple bypass tray, auxiliary tray and ADF opened.

Printer

Type	Embedded	
CPU	ARM Cortex-A7 Dual-core 1.2GHz	
Memory	Shared with the copier	
Print Speed	Same as Copy Speed (when using the same original)	
HDD	250 GB (Shared with the copier)	
Print Resolution	1,800 dpi (equivalent) x 600 dpi (at smoothing) or 1,200 dpi x 1,200 dpi (in 1,200 dpi mode)	
PDL	PCL 6, PostScript 3 Emulation, XPS	
Protocol	TCP/IP, IPX/SPX (NDS support), SMB (NetBEUI), LPD, IPP1.1, SNMP, AppleTalk	
Support OS	Windows Vista ¹¹ / 7 ¹¹ / 8 ¹¹ / 8.1 ¹¹ Windows Server 2008 ¹¹ / 2008 R2 / 2012 / 2012 R2 Mac OS X (10.6 / 10.7 / 10.8 / 10.9 / 10.10) Linux	
Fonts	PCL	80 Roman fonts
	PS	137 Roman Type1 fonts
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), USB 1.1, USB 2.0, IEEE 802.11 b/g/n ¹² , Bluetooth LE ¹²	

¹¹ Supports the 32-bit (x86) or 64-bit (x64) environment.

¹² Optional

Scanning

Type	Full-Colour Scanner	
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T), IEEE 802.11 b/g/n ¹¹	
Driver	TWAIN Driver, HDD TWAIN Driver	
Protocol	TCP/IP (FTP, SMB, SMTP, WebDAV) (IPv4/IPv6)	
Scanning Speed (Colour/B&W) (300 dpi, A4, Simplex)	80 opm ¹²	
Scanning Size	Max. A3 (11" x 17")	
Output Format	TIFF, JPEG, PDF, Compact PDF, XPS, Compact XPS, OOXML (pptx, xlsx ¹ , docx ¹), Searchable PDF ¹ , PDF/A ¹ , Linearised PDF ¹	
Scanning Resolution	Push	200 dpi / 300 dpi / 400 dpi / 600 dpi
	Pull	100 dpi / 200 dpi / 300 dpi / 400 dpi / 600 dpi
Main Functions	Scan to E-Mail, Scan to FTP, Scan to BOX (HDD), Scan to PC (SMB), Network TWAIN, Scan to WebDAV, Scan to USB, Scan to Scan Server, Scan to Web Service (WSD-Scan), Device Profile for Web Services (DPWS)	
Other Functions	Multi-Method Send, Authentication at the time of E-Mail send (SMTP authentication, POP before SMTP), S/MIME, Annotation	

¹¹ Optional

¹² When using the Automatic Document Feeder DF-629.

Internet Fax

Protocol	TX: SMTP, RX: POP3, TCP/IP Simple mode
Connection Mode	Full-Mode
Sending Paper Size	A3, B4, A4
Recording Paper Size	Max. A3
Resolution	B/W: 200 x 100 dpi, 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi Colour: 200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Interface	Ethernet (10BASE-T/100BASE-TX/1000BASE-T)
Colour	Support Colour Internet Fax
Format	B/W: TIFF-F Colour: TIFF (Conforms to RFC3949 Profile-C)

Fax Kit FK-514 (Optional)

Communication	Super G3
Compatible Lines	Public Switch Telephone Network, Private Branch Exchange, Fax Communication Line
Line Density	Ultra Fine: 600 dpi 600 dpi
	Super Fine: 16 dot/mm 15.4 line/mm, 400 dpi 400 dpi
	Fine: 8 dot/mm 7.7 line/mm, 200 dpi 200 dpi Normal: 8 dot/mm 3.85 line/mm
Modem Speed	2.4 to 33.6 kbps
Compression	MH/MR/MMR/JBIG
Sending Paper Size	Max. A3 (Long Length Support: Max. 1,000 mm)
Recording Paper Size	Max. A3 (Long Length Max. 1,000 mm — following the page division —)
Transmission Speed	Less than 2 sec. (A4, V.34, 33.6 kbps, JBIG)
Memory	Shared with the copier
Number of Abbr. Dials	2,000
Number of Program Dials	400
Number of Group Dials	100
Sequential Multiple Station Transmission	Max. 600

IP Address Fax ¹²Optional Fax Kit FK-514 is required.

Protocol Transmission	TCP/IP, SMTP
Sending Paper Size	A3, B4, A4
Resolution	200 x 200 dpi, 400 x 400 dpi, 600 x 600 dpi
Format	B/W: TIFF-F, TIFF-S Colour: TIFF, PDF